

**Loadable
up to 2600 kg!**

Single parking spaces can
also be upgraded to handle
heavier loads at a later date!

Dimensions



Tolerances for space requirements $+3_0$ ③
Dimensions in cm.

Suitable for


Standard passenger cars:
Limousine, station wagon, SUV, van
according to clearance and maximal
surface load.

	Standard	Special ②
Width	190 cm ④	190 cm ④
Weight	max. 2000 kg	max. 2600 kg
Wheel load	max. 500 kg	max. 650 kg

Clearance profile

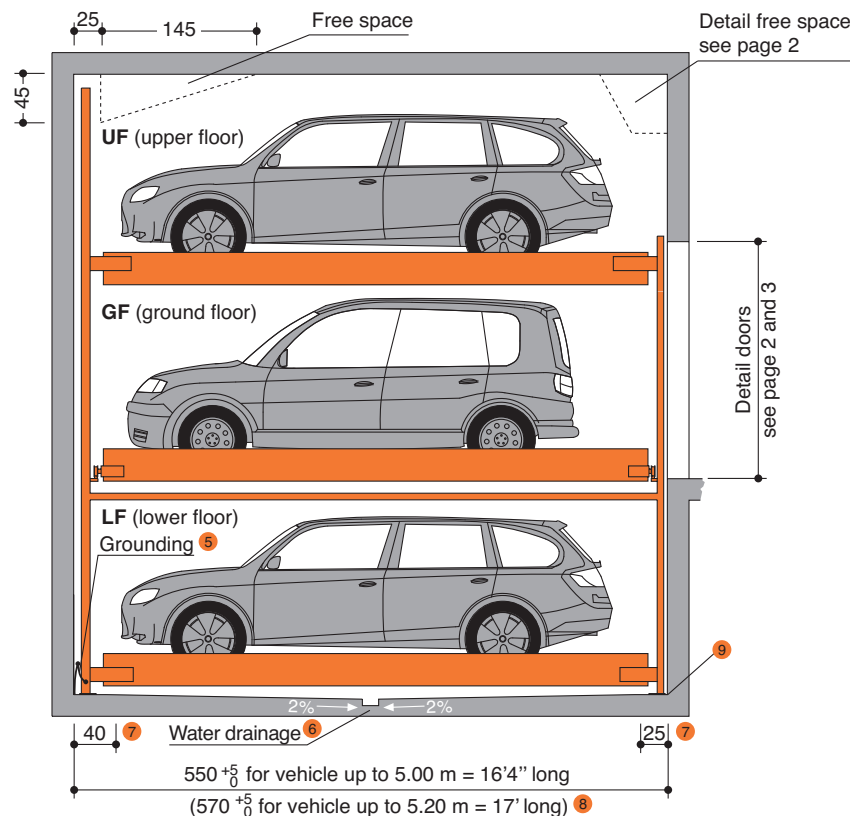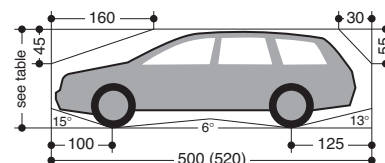


4300-175




Height	Car height		
	UF	GF	LF
325	150	150	150
345	150	170	150
365	150	190	150
365	170	170	150
380	150	205	150
405	190	190	150
435	205	205	150

4300-200




Height	Car height		
	UF	GF	LF
350	150	175	175
375	175	175	175
380	150	205	175
405	175	205	175
435	205	205	175

4300-230



Height	Car height		
	UF	GF	LF
380	150	205	205
405	175	205	205
420	190	205	205
435	205	205	205

4300-240



Height	Car height		
	UF	GF	LF
390	150	215	215
405	165	215	215
415	175	215	215
435	195	215	215
445	205	215	215
455	215	215	215

- ① Standard type
- ② Special system: maximum load for extra charge.
- ③ To follow the minimum finished dimensions, make sure to consider the tolerances according to VOB, part C (DIN 18330 and 18331) and the DIN 18202.
- ④ Car width for platform width 230 cm. If wider platforms are used it is also possible to park wider cars.
- ⑤ Potential equalization from foundation grounding connection to system (provided by the customer).
- ⑥ Slope with drainage channel and sump.
- ⑦ These floor areas need to be horizontal and on equal level across the full width of the pit


- ⑧ For convenient use of your parking space and due to the fact that the cars keep becoming longer we recommend a pit length of 570 cm.

- ⑨ At the transition section between pit floor and walls no hollow mouldings/coves are possible. If hollow mouldings/coves are required, the systems must be designed smaller or the pits accordingly wider.




If sprinklers are required make sure to provide the necessary free spaces during the planning stage.

Sliding door behind columns

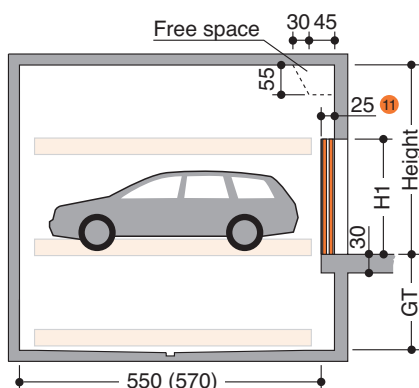


Type	GT	Height	H1
4300	175	325/345/365/405	210
4300	175	380/435	220
4300	200	350/375	210
4300	200	380/405/435	220
4300	230	380/405/420/435	220
4300	240	390/405/415/435/445/455	230

Columns per each grid unit

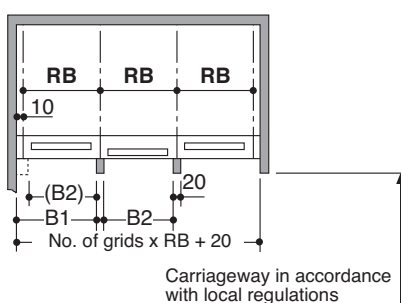


Usable platform width	RB ¹⁰	B1	B2
230	250	250	230
240	260	260	240
250	270	270	250
260	280	280	260
270	290	290	270

Columns every second grid unit

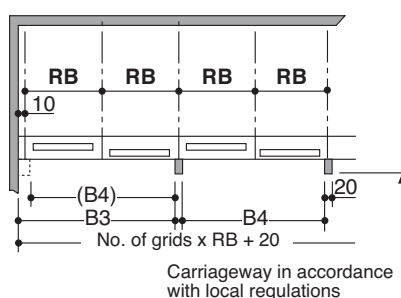

Usable platform width	RB ¹⁰	B3	B4
230	250	500	480
240	260	520	500
250	270	540	520
260	280	560	540
270	290	580	560

Sliding door between columns

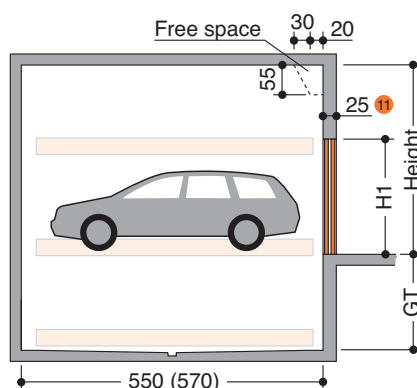


Type	GT	Height	H1
4300	175	325/345/365/405	220
4300	175	380/435	230
4300	200	350/375	220
4300	200	380/405/435	230
4300	230	380/405/420/435	230
4300	240	390/405/415/435/445/455	240

Columns per each grid unit


Not available!

Columns every second grid unit

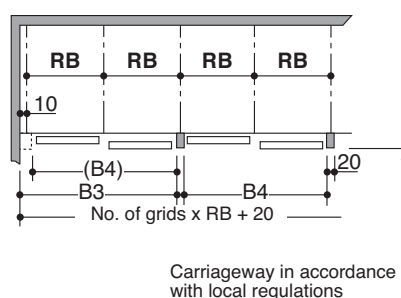


Usable platform width	RB ¹⁰	B3	B4
230	250	500	480
240	260	520	500
250	270	540	520
260	280	560	540
270	290	580	560

Sliding door in front of columns

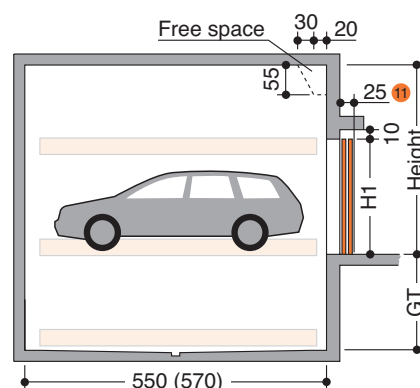


Type	GT	Height	H1
4300	175	325/345/365/405	220
4300	175	380/435	230
4300	200	350/375	220
4300	200	380/405/435	230
4300	230	380/405/420/435	230
4300	240	390/405/415/435/445/455	240

Columns per each grid unit

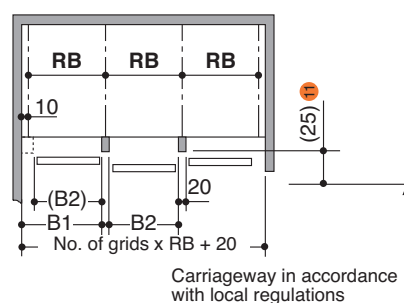

Usable platform width	RB ¹⁰	B1	B2
230	250	250	230
240	260	260	240
250	270	270	250
260	280	280	260
270	290	290	270

Columns every second grid unit

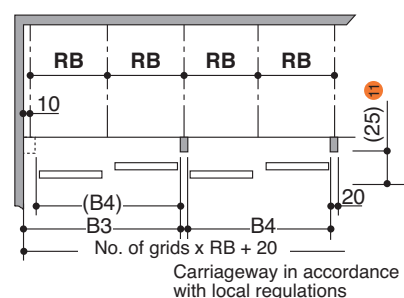


Usable platform width	RB ¹⁰	B3	B5
230	250	500	480
240	260	520	500
250	270	540	520
260	280	560	540
270	290	580	560

For larger limousines and SUV wider driveways are necessary (in particular on the boxes on the sides due to the missing manoeuvring radius).

11 Only applies to manually operated doors. The electrically driven doors must have 35 cm.


Garages with roll doors I Widths dimensions

Roll door behind columns

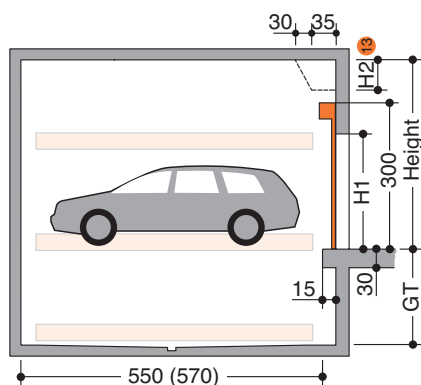

Type	GT	Height	H1
4300	175	325/345/365/405	210
4300	175	380/435	220
4300	200	350/375	210
4300	200	380/405/435	220
4300	230	380/405/420/435	220
4300	240	390/405/415/435/445/455	230

Columns per each grid unit

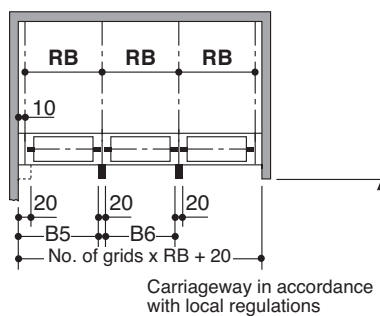

Usable platform width	RB ¹²	B5	B6
230	250	250	230
240	260	260	240
250	270	270	250
260	280	280	260
270	290	290	270

! According to the BGR 232, an inspection book is required for the commercial use of a gate with electric drive. Prior to commissioning, and then once a year, the gate has to be inspected by an expert and the findings entered in the inspection book. The inspection has to be carried out independent of any maintenance work.


For parking boxes on the edges and boxes with intermediate walls we recommend our maximum platform width of 270 cm. Please consider adjoining grids. Problems may occur if smaller platform widths are used (depending on car type, access and individual driving behaviour and capability).

For larger limousines and SUV wider driveways are necessary (in particular on the boxes on the sides due to the missing manoeuvring radius).

¹² RB = Grid unit width **must** strictly conform to dimensions quoted!


¹³ H2 for height >360 = 20 / H2 for height ≥380 = 75

Approach

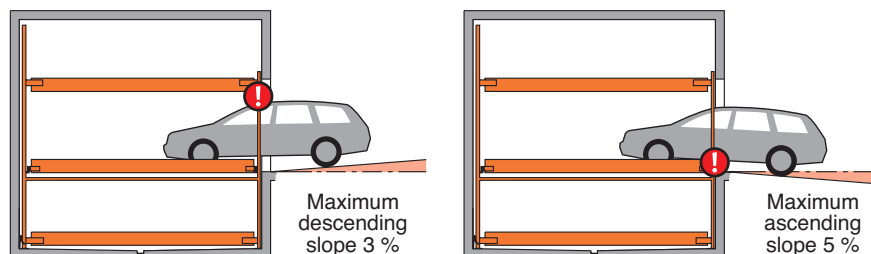

! The illustrated maximum approach angles must not be exceeded. Incorrect approach angles will cause serious manoeuvring & positioning problems on the parking system for which the local agency of KLAUS Multiparking accepts no responsibility.

Longitudinal free space

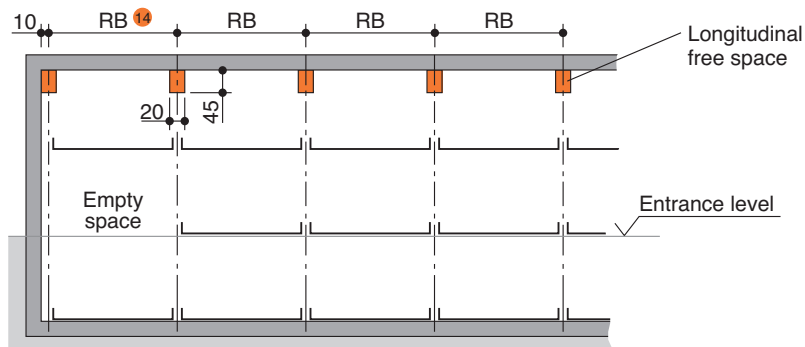


¹⁴ RB = Grid unit width **must** strictly conform to dimensions quoted!

Function with standard numbering and identification of parking levels

e.g. for parking space No. 8:

Check first that all doors are closed, then select No. 8 on operating panel.

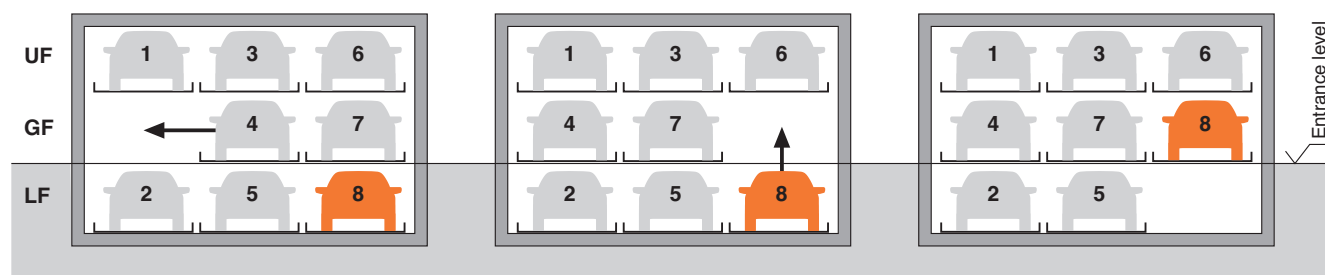


For driving the vehicle off platform No. 8 the ground floor parking platforms are shifted to the left.

The empty space is now below the vehicle which shall be driven off the platform. The platform No. 8 will be lifted.

The vehicle on platform No. 8 can now be driven off the platform.


Load plan

4300-175




Type 4300-175				
Car height				
Height	GF	H3	H4	
325	150	130	245	
345	170	150	265	
365	190	170	285	
365	170	150	265	
380	205	185	300	
405	190	170	285	
435	205	185	300	

4300-200




Type 4300-200				
Car height				
Height	GF	H3	H4	
350	175	155	270	
375	175	155	270	
380	205	185	300	
405	205	185	300	
435	205	185	300	

4300-230

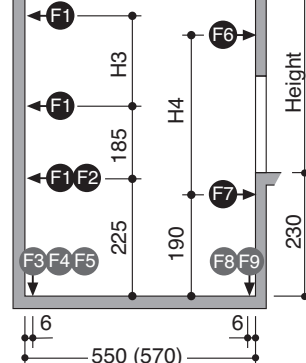


Type 4300-230				
Car height				
Height	GF	H3	H4	
380	205	185	300	
405	205	185	300	
420	205	185	300	
435	205	185	300	

4300-240

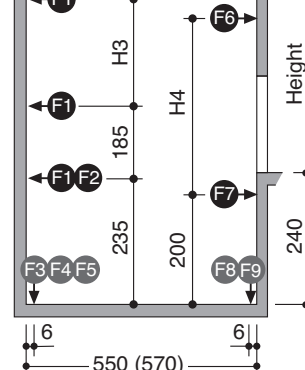

Type 4300-240				
Car height				
Height	GF	H3	H4	
390	215	195	310	
405	215	195	310	
415	215	195	310	
435	215	195	310	
445	215	195	310	
455	215	195	310	

Load plan – top view

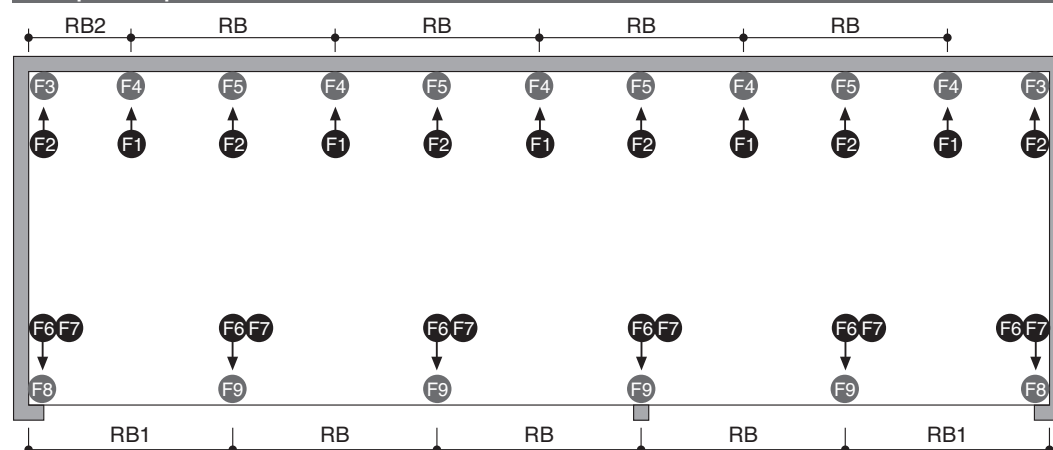

Usable platform width	RB ¹⁵	RB1	RB2
230	250	260	135
240	260	270	140
250	270	280	145
260	280	290	150
270	290	300	155

Platform load	F1	F2	F3	F4	F5	F6	F7	F8	F9 ¹⁶
2000 kg	±5	±2,5	±14,5	+70	±29	±0,2	±2,5	+25	+50
2600 kg	±5	±2,5	±14,5	+80	±29	±0,2	±2,5	+35	+70



The system is dowelled to floor and walls. The drilling depth in the floor is approx. 15 cm.
The drilling depth in the walls is approx. 12 cm.

Floor and walls are to be made of concrete (grade of concrete min. C20/25)!

The dimensions for the points of support are rounded values. If the exact position is required, please contact KLAUS Multiparking.

¹⁵ RB = Grid unit width **must** strictly conform to dimensions quoted!

¹⁶ All forces in kN

Technical data

Field of application

By default, the system can only be used for a fixed number of users.

If different users use the system (e.g. short-time parkers in office buildings or hotels) the Multiparking system needs to be adjusted. If required, would you please contact us.

Available documents

- wall recess plans
- maintenance offer/contract
- declaration of conformity
- test sheet on airborne and slid-borne sound


Environmental conditions

Environmental conditions for the area of multiparking systems: Temperature range -10 to $+40^{\circ}\text{C}$. Relative humidity 50% at a maximum outside temperature of $+40^{\circ}\text{C}$.

If lifting or lowering times are specified, they refer to an environmental temperature of $+10^{\circ}\text{C}$ and with the system set up directly next to the hydraulic unit. At lower temperatures or with longer hydraulic lines, these times increase.

Numbering

Standard numbering of the parking spaces:

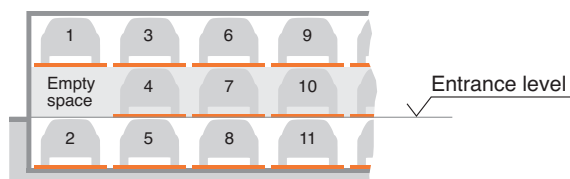

Initial position: lower floor platform No. 2 at entrance level (covering of pit; safety regulation).

Different numbering is only possible at extra cost

Please take note of the following specifications:

- In general, the empty space must be arranged to the left.
- The numbers must be provided 8 – 10 weeks before the delivery date.

Sound insulation

According to DIN 4109 (Sound insulation in buildings), para. 4, annotation 4, KLAUS Multiparkers are part of the building services (garage systems).

Normal sound insulation:

DIN 4109, para. 4, Sound insulation against noises from building services.

Table 4 in para. 4.1 contains the permissible sound level values emitted from building services for personal living and working areas. According to line 2 the maximum sound level in personal living and working areas must not exceed 30 dB (A).

Noises created by users are not subject to the requirements (see table 4, DIN 4109).

The following measures are to be taken to comply with this value:

- Sound protection package according to offer/order (KLAUS Multiparking GmbH)
- Minimum sound insulation of building $R'_w = 57\text{ dB}$ (to be provided by customer)

Increased sound insulation (special agreement):

Draft DIN 4109-10, Information on planning and execution, proposals for increased sound insulation.

Agreement: Maximum sound level in personal living and working areas 25 dB (A). *Noises created by users are not subject to the requirements (see table 4, DIN 4109).*

The following measures are to be taken to comply with this value:

- Sound protection package according to offer/order (KLAUS Multiparking GmbH)
- Minimum sound insulation of building $R'_w = 62\text{ dB}$ (to be provided by customer)

Note: User noises are noises created by individual users in our Multiparking systems. These can be noises from accessing the platforms, slamming of vehicle doors, motor and brake noises.

Electrically driven doors

In accordance with BGR 232 commercially used power-driven doors must be subjected to annual inspections. We urgently recommend concluding a maintenance agreement that includes this service for the entire system.

Building application documents

According to LBO and GaVo (garage regulations) the Multiparking systems are subject to approval. We will provide the required building application documents.

Care

To avoid damages resulting from corrosion, make sure to follow our cleaning and care instructions and to provide good ventilation of your garage.

Corrosion protection

See separate sheet regarding corrosion protection.

CE Certification

The systems on offer comply with DIN EN 14010 and EC Machine Directive 2006/42/EC. Furthermore, this system underwent voluntary conformity testing by TÜV SÜD.


ZERTIFIKAT ◆ CERTIFICATE ◆ CERTIFICADO ◆ CERTIFICAT ◆ 証書



Certificate concerning the examination of conformity

Certificate no:	KP 194
Certification body:	TÜV SÜD Industrie Service GmbH Zertifizierungsstelle für Produkte der Fördertechnik Westendstr. 199 80686 München - Germany
Applicant / Certification holder:	Klaus Multiparking GmbH Hermann-Krum-Str. 2 88319 Altrach - Germany
Date of application:	2012-03-09
Manufacturer:	Klaus Multiparking GmbH Hermann-Krum-Str. 2 88319 Altrach - Germany
Product:	Equipment for power driven parking of motor vehicles
Type:	TrendVario 4100 2.000 kg and 2.600 kg TrendVario 4300 2.000 kg and 2.600 kg
Test laboratory:	TÜV SÜD Industrie Service GmbH Prüflaboratorium für Produkte der Fördertechnik Prüfbereich Maschinen der Fördertechnik Gottlieb-Daimler-Str. 7 70794 Filderstadt - Germany
Date and number of the test report / mark of conformity:	2014-01-22 TÜ SW-12-230 DG
Test specifications:	- 2006 / 42 / EC, Annex I - DIN EN 14010
Validity:	This Certificate is valid until 2019-02-13
Result:	The equipment fulfills the requirements of the test specifications for the respective scope of application stated in the annex (page 1) of this certificate, keeping the mentioned conditions.
Date of issue:	2014-02-14

Certification body for lifts and cranes


 Chadi Nouredine






Electrical data

Control box

The control box must be accessible at all times from outside!

Dimensions approx. 100 x 100 x 30 cm.

Cutting through of wall from control box to parking system (contact the local agency of KLAUS Multiparking for clarification).

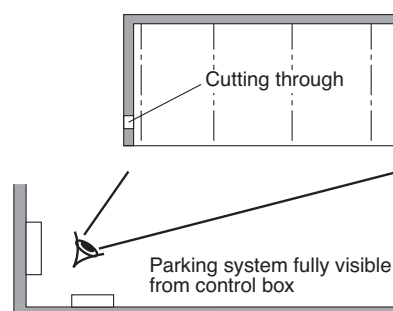

Electrical supply to the control box / Foundation earth connector

Suitable electrical supply min. 5 x 2,5 mm² (3 PH+N+PE) to control box with mains fuse 3 x 16 A slow or over-current cut-out 3 x 16 A trigger characteristic K or C. DIN/VDE and local regulations must be taken into consideration.

Suitable electrical supply to the control box must be provided by the customer during installation. The functionality can be monitored on site by our fitters together with the electrician. If this cannot be done during installation for some reason for which the customer is responsible, the customer must commission an electrician at their own expense and risk.

In accordance with DIN EN 60204 (Safety of Machinery. Electrical Equipment), grounding of the steel structure is necessary, provided by the customer (distance between grounding max. 10 m).

Operating device

Easy-to-survey positioning (e.g. on column).

Protection against unauthorized use.

May also be recessed in wall if required.

To be performed by the customer

Safety fences

Any constraints that may be necessary according to DIN EN ISO 13857 in order to provide protection for the park pits for pathways directly in front, next to or behind the unit. This is also valid during construction.

Numbering of parking spaces

Consecutive numbering of parking spaces.

Building services

Any required lighting, ventilation, fire extinguishing and fire alarm systems as well as clarification and compliance with the relevant regulatory requirements.

Drainage

For the middle area of the pit we recommend a drainage channel, which you connect to a floor drain system or sump (50 x 50 x 20 cm). The drainage channel may be inclined to the side, however not the pit floor itself (longitudinal incline is available). In the interests of environmental protection we recommend painting the pit floor. Oil and petrol separators must be provided according to the statutory provisions when connecting to the public sewage system!

Wall cuttings

Any necessary wall cuttings.

Strip footings

If due to structural conditions strip footings must be effected, the customer shall provide an accessible platform reaching to the top of the said strip footings to enable and facilitate themounting work.

Electrical supply to the control box / Foundation earth connector

Suitable electrical supply to the control box must be provided by the customer during installation. The functionality can be monitored on site by our fitters together with the electrician. If this cannot be done during installation for some reason for which the customer is responsible, the customer must commission an electrician at their own expense and risk.

In accordance with DIN EN 60204 (Safety of Machinery. Electrical Equipment), grounding of the steel structure is necessary, provided by the customer (distance between grounding max. 10 m).

Door suspension

The lintel height H2 (see page 2) is absolutely necessary. With differing heights, additional fixings are required for extra charge.

Door shields

Door shields that may be necessary. If desired, they can be ordered from KLAUS Multiparking for an additional charge.

If the following are not included in the quotation, they will also have to be provided / paid for by the customer:

– Costs for final technical approval by an authorized body

Description

General description:

Multiparking system providing independent parking spaces for cars, one on top of the other and side by side.

Dimensions are in accordance with the underlying dimensions of parking pit, height and width.

The parking bays are accessed horizontally (installation deviation $\pm 1\%$).

Along the complete width of the parking automat an approach lane (driving lane in accordance with local regulations) must be available. Parking spaces are arranged on three different levels, one level on top of the other.

The platforms of both the lower floor (LF) and upper floor (UF) are moved vertically, the platforms of the ground floor (GF) horizontally. At approach level (GF) there is always one parking space less available. This vacant space is used for shifting the ground floor (GF) parking spaces sideways, thus enabling an upper floor (UF) parking space or lower floor (LF) parking space to be lowered or lifted to approach level. Consequently, a unit of five parking spaces (2 on the upper floor, 1 on the ground floor, 2 on the lower floor) is the smallest unit available for this parking system.

The TrendVario 4300 allows parking of passenger cars and station wagons.

For safety reasons the platforms can only be moved behind locked doors.

All necessary safety devices are installed. This consists mainly of a chain monitoring system, locking lever for the upper and lower platforms and locked doors. The doors can only be opened if the selected parking space has reached the park position and all openings are secured.

A steel framework mounted inside the pit, consisting of:

- Seriated supports
- Steel pillars with sliding platform supports
- Cross and longitudinal members
- running rails for the transversely movable ground floor (GF) platforms

Platforms consisting of:

- Side members
- Cross members
- Platform base sections
- 1 wheel stop (on the right per parking space)
- Screws, small parts, etc.

Lifting device for upper floor (UF) and lower floor (LF) platforms:

- Hydraulic cylinder with solenoid valve
- Chain wheels
- Chains
- Limit switches
- The platforms are suspended on four points and guided along the supports using plastic sliding bearings.

Drive unit of transversely movable platforms on the ground floor (GF):

- Gear motor with chain wheel
- Chains
- Running and guide rollers (low-noise)
- Power supply via cable chain

Page 1
Section

Dimensions
Car data

Page 2
Door
Width
dimensions

Page 3
Width
dimensions
Approach
Free spaces

Page 4
Function
Load plan

Page 5
Technical
data

Page 6
Electrical
To be performed by the customer

Page 7
Description

Description

Hydraulic unit consisting of:

- Hydraulic power unit (low-noise, installed onto a console with a rubber-bonded-to-metal mounting)
- Hydraulic oil reservoir
- Oil filling
- Internal geared wheel pump
- Pump holder
- Clutch
- 3-phase-AC-motor (3.0 kW, 230/400 V, 50 Hz)
- Motor circuit breaker
- Test manometer
- Pressure relief valve
- Hydraulic hoses (which reduce noise transmission onto the hydraulic pipe)

Control system:

- Central control panel (operating device) used to select the desired parking space
- With series installation, the doors are opened manually
If desired, this can also be done using electric motors
- Electric wiring is made from the electric cabinet by the manufacturer

Roller doors:

Size

Dimensions modified based on width and height measurements.

Shutter box

- multipart extruded aluminium box 20°
- lacquered type

Guide rails

- extruded aluminium guide rails with brush insert
- lacquered type

Gate type

- aluminium gate type, extruded
- end rod with electronic safety strip
- lacquered type

Colour options

Shutter box, guide rails and gate type are available with the following colour options:

- RAL 9016 (traffic white)
- RAL 9006 (white aluminium)
- RAL 7016 (anthracite grey)

Door actuation

Powered electrically by means of tube motor in the shaft.

For safety reasons the movement of the platforms is always made behind locked doors. Position sensing, i.e. “door open” and “door closed” is effected by electric signalers.

Sliding doors:

Size

Sliding door, dimensions: approx. 2500 mm x 2000 mm (width x height).

Frame

- Frame construction with vertical centre stay bar made from extruded aluminium profiles (anodized, layer thickness approx 20 µm).
- To open the doors a recessed grip is integrated in the aluminium profile.
- A rubber lip is used for the finishing of the closing edge to the building.

Standard door panel

Perforated steel plate

- Thickness 1mm, RV 5/8, galvanized, layer thickness: approx. 20 µm
- Ventilation cross-section of the panel approx. 40%
- Not suitable for outdoor garages

Alternative door panel

Perforated aluminium plate

- Thickness 2mm, RV 5/8 E6/EV1, anodized, layer thickness: approx. 20 µm
- Ventilation cross-section of the panel approx. 40%

Beaded steel plate

- Thickness 1mm, galvanized, layer thickness: approx. 20 µm.
- additional power coating, layer thickness: approx. 25 µm on the outside and approx. 12 µm on the inside
- Colour options for the outside (building view):
RAL 1015 (light ivory), RAL 3003 (ruby),
RAL 5014 (pigeon blue), RAL 6005 (moss green),
RAL 7016 (anthracite grey), RAL 7035 (light grey),
RAL 7040 (window grey), RAL 8014 (sepia),
RAL 9006 (white aluminium), RAL 9016 (traffic white)
- Inside of the gates in light grey

Plain aluminium sheet

- Thickness 2mm, E6/EV1, anodized, layer thickness: approx. 20 µm

Wooden panelling

- Nordic spruce in grade A
- vertical tongue and groove boards
- preimpregnated colourless

Laminated safety glass

- Laminated safety glass made from single pane safety glass 8/4mm

Wire grating

- Mesh size 12 x 12 mm
- Mesh size 40 x 40 mm (for manual sliding gates only)

Running rails

- The running gear of each door consists of 2 twin-pair rolling gadgets, adjustable in height
- The running rails of the doors are fixed to brackets or the concrete lintel, or on a building-specific door suspension using ceiling fittings
- The guide consists of 2 plastic rollers mounted to a base plate, which is dowelled to the floor
- Running rails, ceiling fittings and guide roller base plate are hot-dip galvanized

Door actuation

Standard:

- Manually, i.e. the door is opened and closed by hand

Alternatively:

- Electric drive via electric motor mounted to the rail system at the turning point of the sliding doors. The drive pinion engages into the chain mounted to the door.

For safety reasons the movement of the platforms is always made behind locked doors. Position sensing, i.e. “door open” and “door closed” is effected by electric signalers.

Separation (if necessary):

- Upon request

Please note:

Door panels (on the side, cover for running rails, etc.) and door suspensions are not included in the standard version but can be delivered against surcharge as special equipment.

We reserve the right to change this specification without further notice

KLAUS Multiparking reserves the right in the course of technical progress to use newer or other technologies, systems, processes, procedures or standards in the fulfillment of their obligations other than those originally offered provided the customer derives no disadvantage from their so doing.